

# Ultrafabrics® Collections

Brisa® | Original

Brisa® | Distressed

Brisa® | Spectra

Ultraleather® | Original

Ultraleather® | Promessa®

Ultraleather® | Reef Pro



Acoustics



Breathable

# Brisa<sup>®</sup> | Original



533-3276 Wishbone



533-5747 White



533-3234 Cookie Dough




533-3019 Birch



533-3866 French Vanilla



533-3823 Aztec




533-3277 Moon




533-3915 Putty



533-3822 Bone



533-3863 Cream



533-8202 Koi




533-5820 Quicksilver




533-3914 Bark



533-3864 Desert Clay



533-3867 Golden



533-8245 Cinnabar



533-5802 Ash




533-3275 Gravel



533-3946 New Sand



533-3051 Ginger



533-1383 Pompeiian Red




533-5703 Wrought Iron




533-3022 Shiitake




533-3200 Peat



533-3591 Caramel



533-1373 Salsa




533-5749 Black Onyx




533-3023 Coffee Bean



533-3913 Truffle



533-3825 Canyon



533-1361 Beet Root



533-8203 Flamingo



533-2645 Cambridge Blue



533-3272 Iceberg



533-2698 Sterling Blue



303-4510 Celery



533-1359 Strawberry



533-2620 Evening Blue



533-2523 Turq



533-2697 Mineral



533-4448 Apple Green




533-1344 Rose Red



533-2694 Night Navy



533-2696 Skyway



533-4303 Seaweed



533-4487 Sage



533-9374 Blossom



533-2683 Indigo



533-2621 Blue Sea



533-4302 Esmeralda



533-4488 Olive



533-9400 Cabernet



533-9378 Abyss



Acoustics



Breathable

# Brisa® | Original

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
65% Polyester, 35% Rayon Backing

### Weight:

Approx. 8.9 oz. Per Square Yard  
Approx. 300 Grams Per Square Metre

### Thickness:

Approx. 0.95 Millimetres

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)\*  
BS EN ISO 12947-2 / 160,000 Rubs (Martindale)\*  
\*meets or exceeds

### Hydrolysis:

14+ Weeks  
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)  
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Tensile Strength: BS EN ISO 1421

Air Permeability: ASTM D737

Sound Absorption: ASTM C423

## Colorfastness

Light Fastness

Crocking

## Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1


These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- IMO FTPC Part 8

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



# Brisa<sup>®</sup> | Distressed

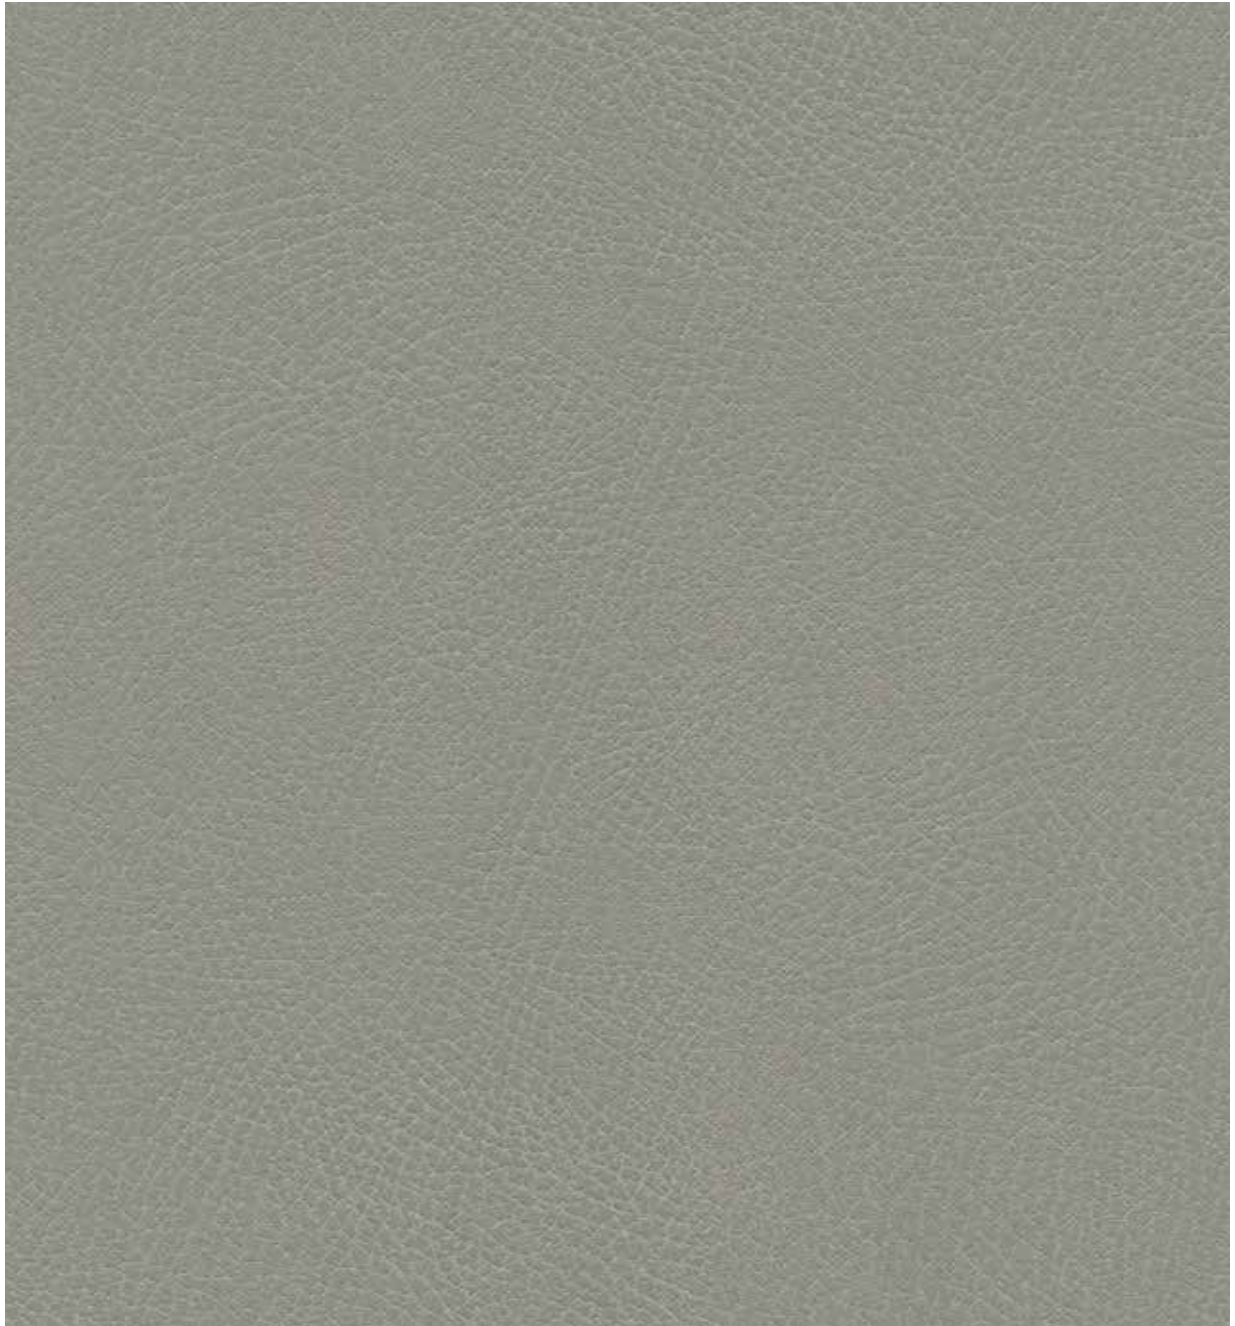

535-3273 Shield



535-3274 Coyote




535-3021 Manila



535-3480 Navajo Ivory



535-3134 Buckskin



535-3340 Desert Tan



535-3271 Koala



535-3273 Shield



535-3024 Chamois



535-3980 Waylan




535-3869 Muslin




535-5679 Iron




535-3871 Moccasin



535-3137 Saddle




535-3972 Lasso




535-4512 Prairie



535-3232 Railroad




535-3231 French Roast




535-3201 Bison




535-3976 Bridle



535-3870 Pelt



535-5773 Stormy



535-3974 Steerhide



Breathable

# Brisa® | Distressed

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
65% Polyester, 35% Rayon Backing

### Weight:

Approx. 8.9 oz. Per Square Yard  
Approx. 300 Grams Per Square Metre

### Thickness:

Approx. 0.95 Millimetres

### Width:

54 Inches / 137 Centimetres

### Repeat:

8"V x 10.5"H / 203mm V x 267mm H

## Performance

### Abrasion:

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)\*  
BS EN ISO 12947-2 / 160,000 Rubs (Martindale)\*  
\*meets or exceeds

### Hydrolysis:

14+ Weeks  
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)  
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Tensile Strength: BS EN ISO 1421

Air Permeability: ASTM D737

Sound Absorption: ASTM C423

## Colorfastness

### Light Fastness

### Crocking

## Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- IMO FTPC Part 8

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.





Acoustics



Breathable

# Brisa<sup>®</sup> | Spectra



620-2720 Dark Sky



620-3473 Paperwhite



620-8256 Zinnia



620-2739 Rainfall




620-0038 Eggshell



620-0039 Crisp Linen



620-3476 Vapor



620-6591 Oxblood



620-2740 Deep Ocean



620-5003 Stardust



620-5283 Mineral Ice




620-3475 Amaretto




620-9346 Prune



620-4393 Spearmint




620-5279 Coal Black




620-5026 Ironwood



620-3546 Barista



620-3547 Dark Coffee



620-4394 Pinelands



Acoustics



Breathable

# Brisa® | Spectra

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
65% Polyester, 35% Rayon Backing

### Weight:

Approx. 8.9 oz. Per Square Yard  
Approx. 300 Grams Per Square Metre

### Thickness:

Approx. 0.95 Millimetres

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)\*  
BS EN ISO 12947-2 / 80,000 Rubs (Martindale)\*

\*meets or exceeds

### Hydrolysis:

14+ Weeks  
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)  
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Tensile Strength: BS EN ISO 1421

Air Permeability: ASTM D737

Sound Absorption: ASTM C423

## Colorfastness

Light Fastness

Crocking

## Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- IMO FTPC Part 8

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

# Ultraleather® | Original



291-5684 Arctic



291-0001 White



291-5805 Ermine



291-5714 Ice



291-5668 Silver Pearl



291-5666 Dove Grey




291-5040 Elephant



291-5708 Granite



291-5763 Charcoal



291-5806 Schooner



291-5607 Raven Wing




291-3720 Light Oyster



291-3455 Milkweed



291-3599 Almond



291-3700 Ivory



291-5250 Sassy



291-3601 Doe



291-3609 Buff



291-3850 Sand



291-3719 Champagne



291-8243 Apricot



291-3729 Tan



291-3926 Cashmere



291-3851 Chamois



291-3778 Pecan



291-6588 Salmon



291-5676 Pelican



291-3183 Pine Cone



291-1256 Papyrus



291-8219 Adobe



291-8233 Autumn Leaf




291-3602 Stone



291-3523 Cave



291-3779 Taupe



291-3612 Curry



291-1347 Poppy




291-3777 Walnut



291-3666 Fudge



291-3205 Hot Chocolate



291-3610 Hide



291-1176 Red



291-7214 Boysenberry



291-9385 Plum



291-2552 Riviera



291-2527 Lagoon



291-5200 Citrus



291-1311 Brick



291-3469 Garnet



291-2685 Bayou



291-2553 Cyan



291-4460 Parrot



291-6580 Sorbet



291-2551 Baltic



291-2508 Rain Dance



291-2507 St. John



291-4454 Sonora



291-1334 Toro



291-2555 Nile



291-2509 Poseidon



291-4314 Herbal Mist



291-4430 Eucalyptus



291-1312 Chianti



291-2556 Admiral



291-2478 Diplomat Blue



291-4351 Shetland



291-4313 Sweetgrass

# Ultraleather® | Original

---

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
100% Reinforced Rayon Backing

### Weight:

Approx. 9.7 oz. Per Square Yard  
Approx. 330 Grams Per Square Metre

### Thickness:

Approx. 0.95 Millimetres

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)\*  
BS EN ISO 12947-2 / 180,000 Rubs (Martindale)\*  
\*meets or exceeds

### Hydrolysis:

14+ Weeks  
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)  
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Tensile Strength: BS EN ISO 1421

## Colorfastness

### Light Fastness

### Crocking

## Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:


- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- IMO FTPC Part 8

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.




Antimicrobial

# Ultraleather® | Promessa®

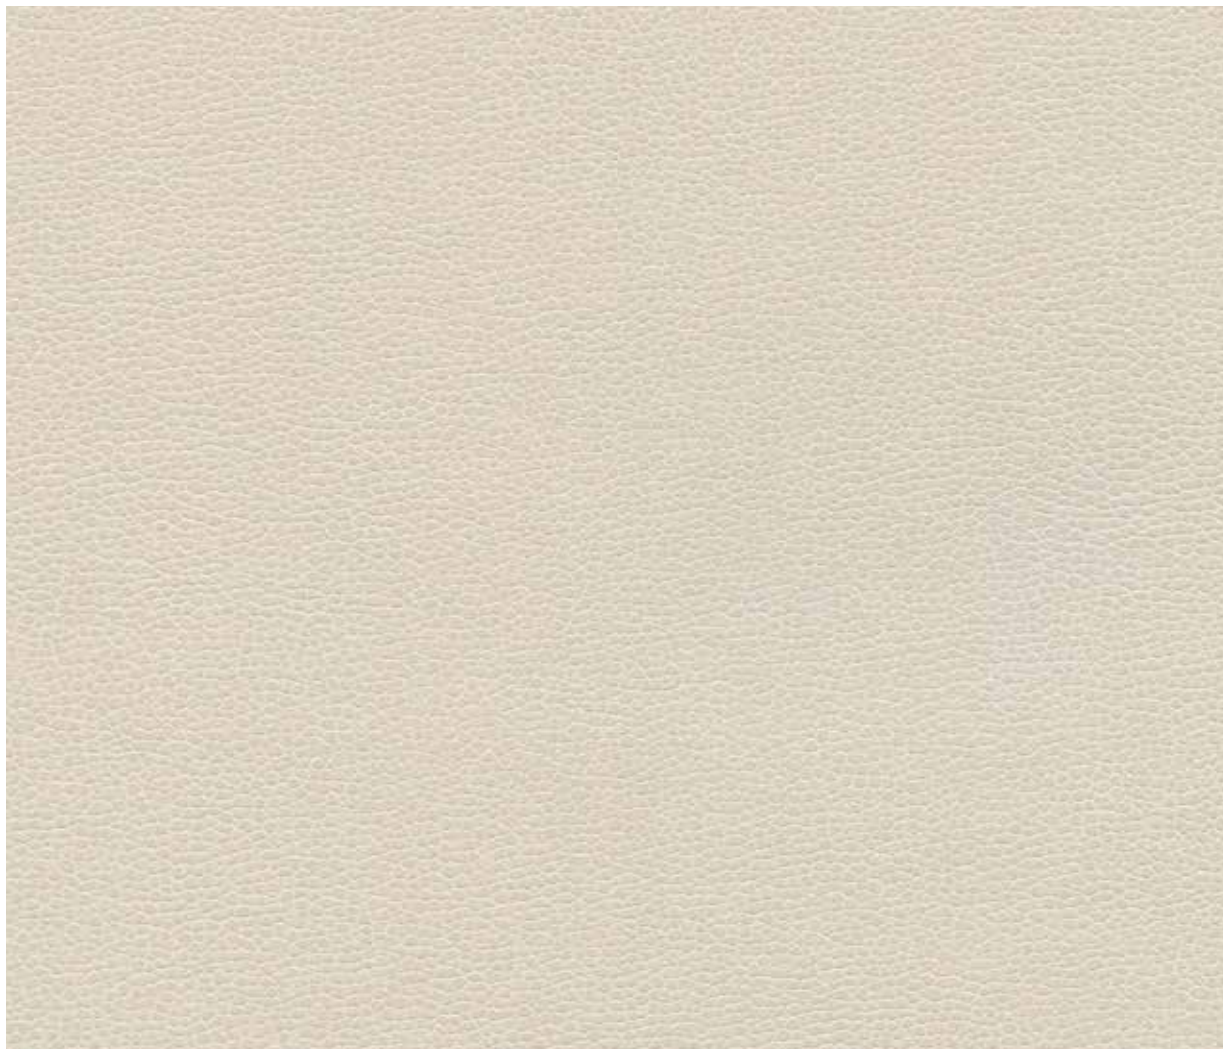


363-3464 Tusk




363-5715 Snow




363-3152 Parchment




363-3463 Cocoa




363-3462 Woodpecker




363-3391 Sparrow




363-5818 Ash




363-5817 Shale



363-5011 Battleship



363-5845 Ebony




363-3037 Horsehair







363-3036 Linen



363-5263 Mustard




363-2695 Aquamarine




363-4515 Shetland




363-3189 Barley



363-5258 Sun Shower



363-2604 Stone Blue




363-7309 Malibu




363-3148 Briarwood



363-3142 Camel




363-2680 Atlantic




363-4481 Scallion




363-3141 Fields




363-3145 Bronze




363-2672 Corn Flour




363-7273 Aspen Green




363-3195 Mesquite




363-1396 Blood Orange




363-9387 Moroccan Fig



363-9414 Merlot



363-1387 Dogwood



363-9371 Beet



Antimicrobial

# Ultraleather® | Promessa®

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
65% Polyester, 35% Rayon Backing

### Weight:

Approx. 11.5 oz. Per Square Yard  
Approx. 390 Grams Per Square Metre

### Thickness:

Approx. 1.1 Millimetres

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)\*

BS EN ISO 12947-2 / 180,000 Rubs (Martindale)\*

\*meets or exceeds

### Hydrolysis:

14+ Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Antimicrobial: ASTM E2180

Tensile Strength: BS EN ISO 1421

## Colorfastness

Light Fastness

Crocking

## Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- IMO FTPC Part 8

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.




# Ultraleather® | Reef Pro



624-1413 Octopus




624-2632 Beluga



624-3792 Hammerhead



624-3487 Sea Star



624-1415 Clownfish



624-4316 Caribbean



624-5246 Submarine



624-3841 Stingray




624-3561 Boardwalk




624-1414 Coral



624-2722 Saltwater




624-4434 Seagrass




624-5288 Squid




624-3536 Lionfish



624-1408 Lobster



624-2627 Captain



624-4392 Algae



Ink & Stain Resist

# Ultraleather® | Reef Pro

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
65% Polyester, 35% Rayon Backing

### Weight:

Approx. 12.1 oz. Per Square Yard  
Approx. 410 Grams Per Square Metre

### Thickness:

Approx. 1.15 Millimetres

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)\*  
BS EN ISO 12947-2 / 200,000 Rubs (Martindale)\*

\*meets or exceeds

### Hydrolysis:

14+ Weeks  
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)  
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Tensile Strength: BS EN ISO 1421

## Colorfastness

### Light Fastness

### Crocking

## Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- IMO FTPC Part 8

## Ultraleather | Reef Pro Resists:

- Ballpoint ink
- Blood
- Mustard and Ketchup
- Betadine
- Denim\*
- Red Wine

\* Removal of denim dye may vary depending on the period of time the stain sets in. While Pro offers excellent protection, full removal is not guaranteed.

For more information on our fabrics, cleaning and care instructions, please visit our website.